



型号
AGLT5 AGLTA7




型号区分: 7 天发货
代码

■ 直线导轨定位销



| 代码 | 材质 | 表面处理 |
|-------|--------------|-------|
| AGLT | S45C (调质) | 无电解镀锌 |
| AGLTS | SUS420J2 | — |




| 代码 | 型号 | | H | Df7 | L | N | L1 | L2 | L3 | B1 | B2 | 安装孔尺寸 | | | (推荐) 紧固扭矩 Ncm | (推荐) 压紧力 KN | 重量 (g) |
|-------|-----|------|----|-----|---|-----|----|-----|-----|----|-----|-------|---------|-----|------------------|-------------|--------|
| | T | H | | | | | | | | | | D1 | F (min) | W | | | |
| AGLT | 1.4 | 12.8 | 10 | 10 | 8 | 2.5 | 5 | 1.4 | 1.6 | 5 | 2.5 | 10 | 11 | 6.5 | 90 | 1.8 | 7 |
| | 1.8 | | | | | | | | | | | | | | 120 | 2.5 | 7 |
| AGLTS | 3.5 | 14.8 | 12 | 12 | 9 | 6 | | | | | | 12 | 12 | 7.5 | 190 | 3.9 | 8 |
| | 5 | | | | | | | | | | | | | | 270 | 5.5 | 14 |

■ 直线导轨简易定位销



材 质 S45C(调质)
表面处理 发黑
附 件 安装螺丝

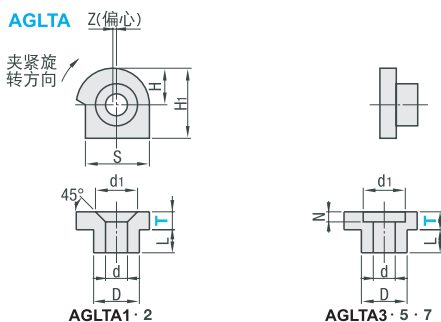

| 代码 | 型号 | | L | D _{±0.01/0.06} | H | H ₁ | S | Z | d | d ₁ | N | 安装孔尺寸 | | | | | 重量 (g) | 安装螺丝 | | (推荐) 压紧力 KN | | | | | | | | | | | | | |
|-------|----|-----|---|-------------------------|---|----------------|-----|-----|-----|----------------|---|----------------|---|----|---|--------------------|---------|---------|------|-------------|-----|-----|-----|---|----|---|---|----|---|----|---------|-------|-----|
| | T | H | | | | | | | | | | D ₁ | W | F | M | a _(min) | | 字槽平头小螺丝 | M2×8 | | | | | | | | | | | | | | |
| AGLTA | 1 | 2.8 | 5 | 4 | 8 | 7 | 0.4 | 2.4 | 4.6 | — | 5 | 4 | 3 | M2 | 5 | 0.6 | 字槽平头小螺丝 | M2×8 | 1 | | | | | | | | | | | | | | |
| | 2 | | | | | | | | | | | | | | | 1 | | | | | | | | | | | | | | | | | |
| | 3 | | | | | | | | | | | | | | | 3.8 | 7 | 6 | 12 | 11 | 0.5 | 3.4 | 6.2 | 2 | 7 | 6 | 4 | M3 | 6 | 3 | 短头内六角螺栓 | M3×10 | 2.4 |
| | 5 | | | | | | | | | | | | | | | 4.8 | 9 | 7 | 14 | 13 | 0.5 | 4.5 | 8 | 3 | 9 | 7 | 5 | M4 | 6 | 6 | 短头内六角螺栓 | M4×12 | 3.8 |
| | 7 | | | | | | | | | | | | | | | 5.8 | 11 | 8 | 18 | 14 | 0.5 | 5.5 | 9.5 | 4 | 11 | 8 | 6 | M5 | 8 | 13 | 短头内六角螺栓 | M5×16 | 5.8 |

