



型号(1)代码·(2)M) — (3)S  
DCLW12 — 5


■请按步骤①~③选择型号和参数后进行订购。



型号区分: 5 天发货  
代码

### ■不锈钢主体型

负载分类	代码	主体	前端		弹簧	可使用温度
		材质	材质	硬度		
不锈钢 前端	超轻载型	DCLSW	SUS304	SUS440C	55HRC~	-30~260℃
	轻载型	DCLW				
	重载型	DCHW				
树脂 前端	超轻载型	DCXW	聚缩醛	-	SUS631	-30~80℃
	轻载型	DCLK				
	重载型	DCHK				
	超重载型	DCXK				

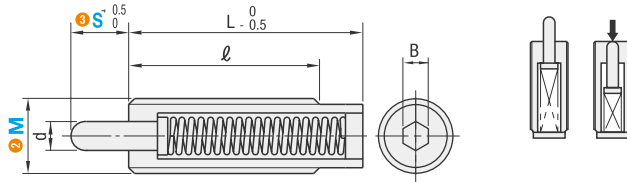

型号		③S	d	ℓ	L	B	超轻载型 (DCLSW · DCLSK)		轻载型 (DCLW · DCLK)		重载型 (DCHW · DCHK)		超重载型 (DCXW · DCXK)	
①代码	②M (粗牙螺纹)						min.	N max.	min.	N max.	min.	N max.	min.	N max.
(不锈钢凸梢)	3	1.5	1.0	15	15	0.9	0.12	0.4	0.4	1.3	0.8	2.94	1.1	3.42
		3		15	15		0.12	0.4	0.2	1.3	0.6	2.93	0.8	3.41
		2	1.6	15	15	1.3	0.27	0.65	0.9	2.0	2.0	8.8	6.1	13.8
	4	4	1.6	24	24	1.3	0.18	0.65	0.6	2.1	1.9	8.75	5.8	13.6
		3		20	20		1.5	0.4	3	1.4	9.7	2.7	16.3	6.8
		5	2.0	27	27	1.5	0.35	3	1.1	10.3	1.0	17.1	5.7	21.5
(树脂凸梢)	6	3	2.5	25	25	2	1.8	3.05	6.0	9.8	8.0	26.4	15.8	35.6
		5		30	30		1.5	3.05	3.4	9.86	4.4	26.6	12.9	34.4
		3	3.1	25	25	2.5	1.9	3.15	6.0	9.9	14.7	27.0	21.9	36.3
	8	5	3.1	27	27	2.5	1.4	3.15	4.0	9.83	6.7	26.6	14.7	34.5
		3		30	30		1.6	4.6	5.7	14.7	8.2	45.7	24.5	58.6
		5	3.8	30	43	3	1.6	4.6	4.4	14.7	6.2	45.1	19.8	58.7
10	5	3.8	30	30	3	1.7	4.7	5.8	14.7	18.2	49.0	34.9	63.6	
	10		35	43		4	1.6	4.7	5.0	14.7	8.2	49.1	25.5	63.6
	12	15	5.5	35	51	4	1.8	4.7	6.9	14.7	7.5	48.9	20.1	63.7
		10		35	57		2.8	10.8	9.2	34.2	18.9	68.5	38.7	88.4
16	15	8.0	35	57	5	2.6	10.8	8.6	34.4	14.4	68.6	33.9	88.1	
	20		35	65		2	11	7.1	34.4	4.2	68.6	25.4	88.1	

①未进行防松动处理。②负载min.表示初始负载，max.表示凸梢最大压入限度时的负载。

国际单位1N≈0.102kgf