



# 垫圈/轴环/垫片

## 垫片环 固定型



型号(1代码·2d) — (3D) — (4T)  
ECMRS6 — 12 — 0.1

■请按步骤①~④选择型号和参数后进行订购。




型号区分: 7天发货  
代码

### ■垫片环 — 固定型 —



固定型	材质	硬度	厚度(T)公差									
			0.01	0.02	0.03	0.05	0.1	0.2	0.3	0.5	1.0	
ECMRS	SUS304H	370~430HV	±0.003	±0.005	±0.005	±0.02	±0.03	±0.035	±0.04	±0.05	±0.05	
ECMR	SPCC	—	—	—	—	±0.03	±0.04	±0.06	±0.11	—	—	
ECALD	黄铜 (C2801P或2680P)	—	—	—	—	±0.005	±0.02	±0.03	±0.04	±0.05	±0.08	

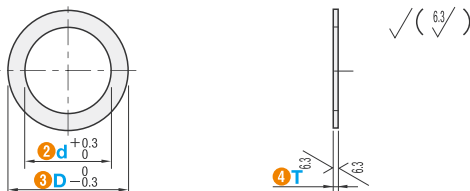

### ■SUS304H

型号		③D 选择	④T 选择
①代码	②d		
ECMRS	2	3 4 5 6	0.01 0.02 0.03 0.05 0.1 0.2 0.3 0.5 1.0
	3	4 5 6 7 8 9 10	
	4	5 6 7 8 9 10 12 13	
	5	7 8 9 10 12 13 14 15 16	
	6	8 9 10 12 13 14 15 16 18	
	8	10 12 13 14 15 16 18 20	
	10	12 13 14 15 16 18 20	
	12	15 16 18 20 21 22	
	15	18 20 21 22 24	
	16	20 21 22 24 28	
	17	20 21 22 24 28 30 32	
	20	24 28 30 32 35 40	
	22	28 30 32 35 40	
	25	30 32 35 40 42	
	28	32 35 40 42 45	
	30	35 40 42 45 50	
35	42 45 50 55		
40	45 50 55		
45	50 55		

### ■黄铜 · SPCC

型号		③D 选择	④T 选择
①代码	②d		
ECMR ECALD	2	4 5 6	(0.05) 仅ECMR 0.1 0.2 0.3 0.5 1.0
	3	5 6 7 8 10	
	4	6 7 8 10 12	
	5	7 8 10 12 14 16	
	6	8 10 12 14 16	
	8	12 14 16 18 20	
	10	12 14 16 18 20	
	12	16 18 20 21 22	
	15	18 20 21 22 24	
	16	20 21 22 24 28	
	17	20 21 22 24 28 30 32	
	20	24 28 30 32 35 40	
	22	28 30 32 35 40	
	25	30 32 35 40 42	
	28	32 35 40 42 45	
	30	35 40 42 45 50	
35	42 45 50 55		
40	45 50 55		
45	50 55		