



型号(1代码·2M) — (3)L
EBL5 10

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分:
代码 5 天发货

■ 内六角螺栓 — 防松动型 —



代码	材质	表面处理	硬度	强度分类
EBL	SCM435	发黑	38~43HRC	12.9
EBSUSL	SUS304	—	—	A2-70

M×P	A	E	B
4×0.7	7	4	3
5×0.8	8.5	5	4
6×1.0	10	6	5
8×1.25	13	8	6
10×1.5	16	10	8
12×1.75	18	12	10


※强度分类是指螺栓的抗拉强度。

(例)12.9

— 表示屈服点或耐力的最小值为抗拉强度的90%。
— 表示抗拉强度的最小值为1220N/mm²。

(例)A2-70

— 表示抗拉强度的最小值为700N/mm²。
— 钢分类为A2(奥氏体不锈钢)

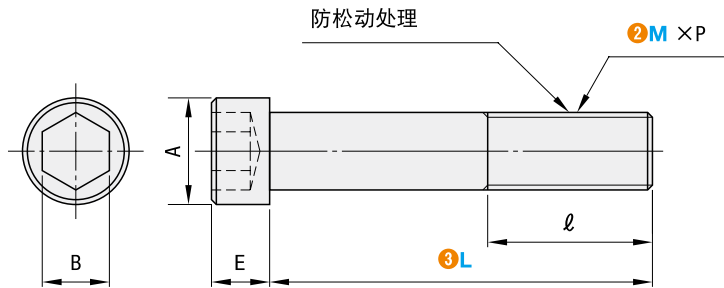

■ 铁

1 代码	型号		l	
	2 M	3 L		
EBL	4-8	全螺纹	20	
				10
				12
				15
				20
				25
	5-10	全螺纹	22	
				12
				15
				20
				25
				30
6-10	全螺纹	24		
			15	
			20	
			25	
			30	
			35	

1 代码	型号		l	
	2 M	3 L		
EBL	8-15	全螺纹	28	
				20
				25
				30
				35
				40
	10-20	全螺纹	32	
				25
				30
				35
				40
				45
12-25	全螺纹	36		
			30	
			35	
			40	
			45	
			50	

■ 不锈钢

1 代码	型号		l	
	2 M	3 L		
EBSUSL	4-8	全螺纹	22	
				10
				12
				15
				20
				25
	5-10	全螺纹	22	
				12
				15
				20
				25
				30
6-15	全螺纹	24		
			20	
			25	
			30	
			35	
			40	
8-15	全螺纹	28		
			20	
			25	
			30	
			35	
			40	