



型号 (1 代码 · 2 T)
AGLT5




型号区分: 5 天发货
代码

■ 直线导轨定位销



代码	材质	表面处理
AGLT	S45C (调质)	无电解镀锌
AGLTS	SUS420J2	—




型号		H	D17	L	N	L1	L2	L3	B1	B2	安装孔尺寸			(推荐) 紧固扭矩 Ncm	(推荐) 压紧力KN	重量 (g)
1 代码	2 T										D1	F (min)	W			
AGLT	1.4	12.8	10	8	2.5	5	1.4	1.6	5	2.5	10	11	6.5	90	1.8	7
	1.8										120	2.5	7			
	3.5										190	3.9	8			
AGLTS	5	14.8	12	9	6	—	—	—	—	—	12	12	7.5	270	5.5	14

■ 直线导轨简易定位销



材 质 S45C(调质)
表面处理 发黑
附 件 安装螺丝

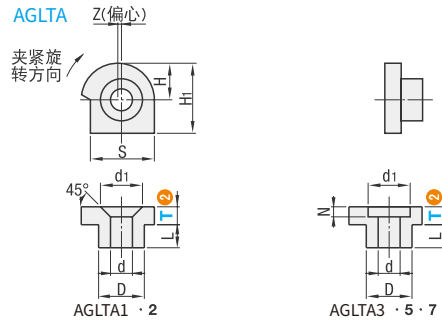

型号		L	D = 0.01 / 0.06	H	H1	S	Z	d	d1	N	安装孔尺寸					重量 (g)	安装螺丝	(推荐) 压紧力 KN																	
1 代码	2 T										D1	W	F	M	g _(min)																				
AGLTA	1	2.8	5	4	8	7	0.4	2.4	4.6	—	5	4	3	M2	5	0.6	字槽平头小螺丝 M2×8	1																	
	2																		1	1.2															
	3																		3.8	7	6	12	11	0.5	3.4	6.2	2	7	6	4	M3	6	3	短头内六角螺栓 M3×10	2.4
	5																		4.8	9	7	14	13	0.5	4.5	8	3	9	7	5	M4	6	6	短头内六角螺栓 M4×12	3.8
	7																		5.8	11	8	18	14	0.5	5.5	9.5	4	11	8	6	M5	8	13	短头内六角螺栓 M5×16	5.8