




六角型




代码		材质	表面处理
螺纹长度固定型	螺纹长度指定型		
BDLCA	BDLNCA	S45C	发黑
BDPLCA	BDPLNCA		无电解镀镍
BDSLCA	BDSLNCA	SUS304	-

6.3/(1.6/)

螺纹长度固定型

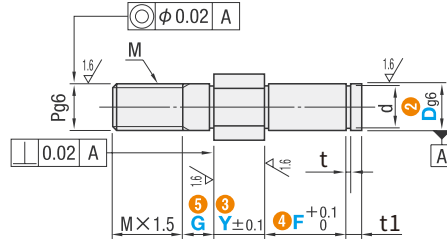

螺纹长度指定型

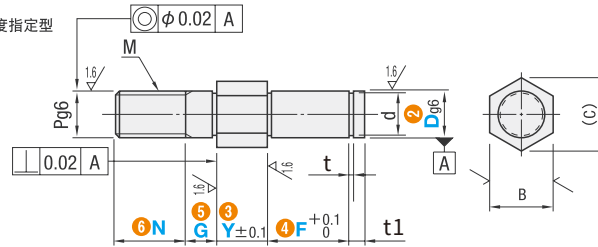

① 代码	② Dg6	最小单位 1mm				Pg6	M (粗牙螺纹)	B	(C)	d		t	t1					
		③ Y	④ F	⑤ G	⑥ N					基准尺寸	公差							
螺纹长度 固定型 BDLCA BDPLCA BDSLCA	3	2~30	3~50	3~8	3~6	3	M3	6	6.9	2	+0.060 0	0.5	2					
	4				4~8	4	M4			3	+0.075 0							
	5				5~10	5	M5			4								
	6				6~12	6	M6			5								
螺纹长度 指定型 BDLNCA BDPLNCA BDSLNCA	8	2~60	5~100	5~10	8~16	8	M8	10	11.5	7	+0.090 0 -0.090	0.9	3					
	10				10~20	10	M10			9.6								
	12				10~100	5~15	12~24			14	12			M12	14	16.2	11.5	0 -0.110
	15									17	19.6			14.3				



型号 (①代码 · ②D) - ③Y - ④F - ⑤G - ⑥N - (SET)
BDLNCA10 - 20 - F15 - G8 - SET

可选加工	挡圈组件		
代码	SET		
技术说明	附带符合轴径的挡圈。 [指定方法SET ①所有型号适用 扣环形状 No.3~8(D=3~8): E型挡圈 No.10~15(D=10~15): C型挡圈		
	扣环材质		
		悬臂销	挡圈
	材质	表面处理	材质
	S45C	发黑 无电解镀镍	弹簧钢
SUS304	-	SUS304-CSP	
SCM435	发黑	弹簧钢	