



型号(①代码·②d) — ③L  
DAAU8 — 8

■ 请按步骤①~③选择型号和参数后进行订购。




型号区分: ④ 天发货  
代码



代码		材质	表面处理	硬度
D尺寸p6	D尺寸m6			
DAAUP	DAAU	SUJ2 或 SKS3	-	淬火硬度58HRC~
DAAUNP	DAAUN		无电解镀锌	淬火硬度58HRC~
DAAUCP	DAAUC	SUS440C	-	淬火硬度50~55HRC

d	d公差	
	无表面处理	无电解镀锌
3	+0.008 +0.002	+0.010 0
4	+0.012 +0.004	+0.012 0
5		
6	+0.014 +0.005	+0.014 +0.005
8		
10	+0.017 +0.006	+0.017 +0.006
12		
13	+0.020 +0.007	+0.020 +0.007
15		
20		
25		

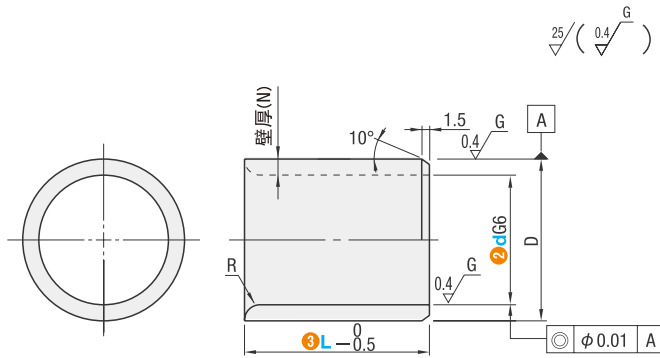

D	D公差	
	p6	m6
5	+0.020	+0.012
6	+0.012	+0.004
7	+0.024	+0.015
8	+0.024	+0.015
10		
13	+0.029	+0.018
15	+0.018	+0.007
17		
19	+0.035	+0.021
21	+0.022	+0.008
26		
31	+0.042	+0.025
	+0.026	+0.009

型号		③L选择							D	壁厚(N)	R		
①代码	②d	3	6	8	10	12	15	16					
<p6> DAAUP DAAUNP DAAUCP	<m6> DAAU DAAUN DAAUC	3	6	8	10	12				5	1	0.5	
		4	6	8	10	12	15	16		6	1	0.5	
		5	6	8	10	12	15	16	20	7	1	0.5	
		6	6	8	10	12	15	16	20	8	1	0.5	
		8	6	8	10	12	15	16	20	10	1	0.5	
		10	6	8	10	12	15	16	20	13	1.5	0.5	
		12		8	10	12	15	16	20	15	1.5	0.5	
		13			10	12	15	16	20	17	2	1	
		15				12	15	16	20	19	2	1	
		16					12	15	16	20	21	2.5	2
		20						12	15	16	20	25	2
		25								20	25	3	2
											20	25	2