



同步轮/同步带/免键轴衬

同步齿形带用金属件 过压防止型




型号(①代码) — ②皮带编号 · ③皮带公称宽度
CBCK — XL025

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: ③ 天发货
代码

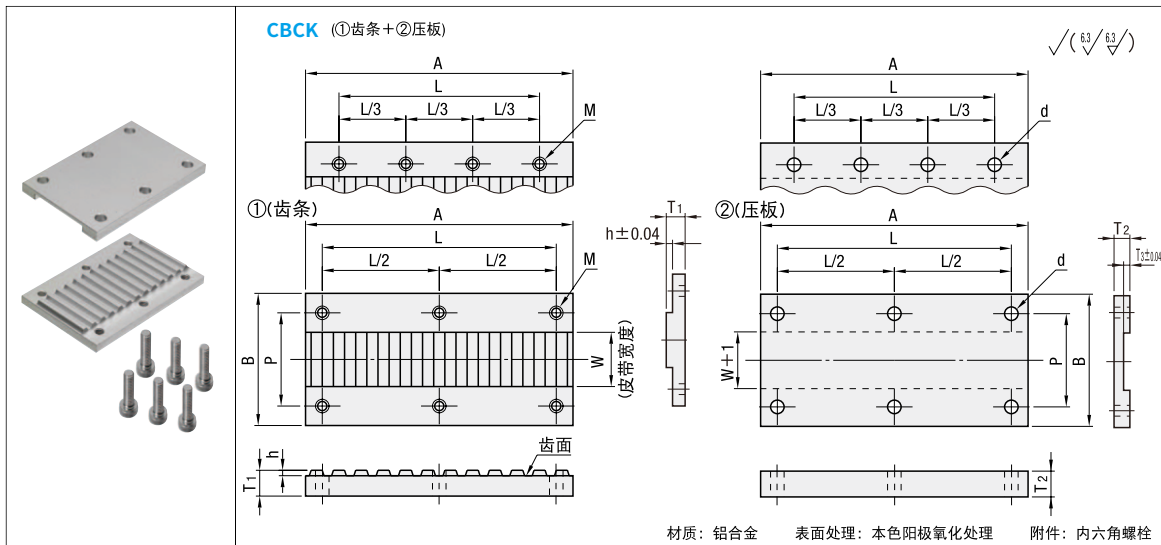

型号			W	A	B	T ₁	T ₂	T ₃	h	L	P	M	d	附属螺栓	安装孔数
① 代码	② 皮带种类	③ 皮带公称宽度													
CBCK (①+②)	XL	025	6.4	66	24	6	4.5	2.10	1.30	56	13	M4	4.5	M4-10	6
		037	9.5		26						16				
		050	12.7		30						20				
	L	050	12.7	124	32	8	5.5	3.33	2.05	111	21	M5	5.5	M5-12	8
		075	19.1		38						27				
		100	25.4		46						34				
	H	075	19.1	165	38	10	6.5	4.15	2.55	147	27	M5	5.5	M5-14	8
		100	25.4		46						34				
		150	38.1		58						46				
	S3M	060	6	39	18	4	3.5	1.94	1.25	31	11	M3	3.4	M3-6	6
		100	10		26						17				
		S5M	150		15						65				
	250		25	42	32										
	S8M		150	15	104	34	8	6.5	4.72	3.00		84	23	M5	5.5
		250	25	44		33									
		300	30	50		38									
	T5	100	10	65	26	6	4.5	2.20	1.40	51	17	M4	4.5	M4-10	6
		150	15		32						22				
		200	20		38						27				
	T10	250	25	130	43	8	6.5	4.30	2.70	111	32	M5	5.5	M5-12	8
		150	15		34						23				
		200	20		40						28				
		250	25		44						33				
		300	30		50						38				
400		40	60		48										
500		50	70		58										

同步轮·同步带
免键轴衬