

弹簧/氮气弹簧

拉伸弹簧

中重载·重载型




型号 (1) 代码 (2) D (3) L
LBAT10 - 50

■ 请按步骤 ①~③ 选择型号和参数后进行订购。



型号区分: 代码 5 天发货

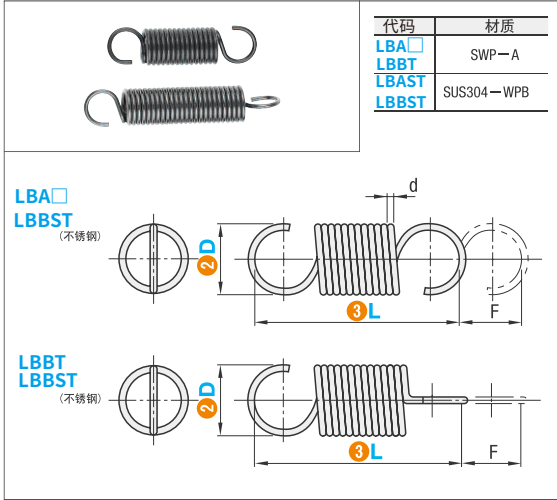

■ 重载型

型号 ① 代码 ② D-③ L	线径 dmm	动态负载时		(初始张力) N	(弹簧 常数) N/mm
		最大 位移量 Fmax. Mm	最大 负载 N		
3-10	0.5	2	8.8	2.16	3.24
15	0.5	3.7	8.8	2.16	1.77
20	0.5	5.2	8.8	2.16	1.27
25	0.5	6.8	8.8	2.16	0.98
(30)	0.5	8.5	8.8	2.16	0.78
4-15	0.6	4	11.1	2.55	2.16
20	0.6	6.4	11.1	2.55	1.37
25	0.6	8.4	11.1	2.55	0.98
30	0.6	10.9	11.1	2.55	0.78
(35)	0.6	12.4	11.1	2.55	0.69
(40)	0.6	15	11.1	2.55	0.57
5-15	0.8	2.9	20.79	5.1	5.39
20	0.8	4.6	20.79	5.1	3.43
25	0.8	6.4	20.79	5.1	2.45
30	0.8	8.4	20.79	5.1	1.86
35	0.8	10	20.79	5.1	1.57
(40)	0.8	11.4	20.79	5.1	1.38
(45)	0.8	13.3	20.79	5.1	1.18
(50)	0.8	15.2	20.79	5.1	1.03
6-20	1	3.7	33.15	8.6	6.57
25	1	5.3	33.15	8.6	4.61
30	1	6.9	33.15	8.6	3.53
35	1	8.3	33.15	8.6	2.94
40	1	10	33.15	8.6	2.45
(45)	1	10.8	33.15	8.6	2.27
(50)	1	12.5	33.15	8.6	1.96
(55)	1	14.3	33.15	8.6	1.71
(60)	1	15.6	33.15	8.6	1.57
8-25	1.2	5.3	41.19	9.81	5.88
30	1.2	7.3	41.19	9.81	4.31
35	1.2	9.1	41.19	9.81	3.43
40	1.2	11.9	41.19	9.81	2.65
45	1.2	13.6	41.19	9.81	2.35
50	1.2	15.5	41.19	9.81	2.06
(55)	1.2	16.8	41.19	9.81	1.87
(60)	1.2	18.8	41.19	9.81	1.67
(65)	1.2	20.6	41.19	9.81	1.52
(70)	1.2	22.8	41.19	9.81	1.38
10-30	1.6	5.2	77.47	20.59	10.89
15	1.6	6.8	77.47	20.59	8.34
20	1.6	8.4	77.47	20.59	6.77
25	1.6	10	77.47	20.59	5.69
30	1.6	11.6	77.47	20.59	4.9
35	1.6	13.2	77.47	20.59	4.31
40	1.6	15.2	77.47	20.59	3.73
(45)	1.6	17	77.47	20.59	3.35
(50)	1.6	19.3	77.47	20.59	2.95
(55)	1.6	20.7	77.47	20.59	2.75
(60)	1.6	24.1	77.47	20.59	2.36
(65)	1.6	26.3	77.47	20.59	2.16
(70)	1.6	29	77.47	20.59	1.96
12-40	2	6.6	120.62	34.3	13.04
45	2	7.7	120.62	34.3	11.18
50	2	9.4	120.62	34.3	9.22
55	2	10.5	120.62	34.3	8.24
60	2	12.1	120.62	34.3	7.16
65	2	13.1	120.62	34.3	6.57
70	2	14.9	120.62	34.3	5.79
75	2	16	120.62	34.3	5.39
80	2	17.6	120.62	34.3	4.9
(85)	2	19.1	120.62	34.3	4.52
(90)	2	22	120.62	34.3	3.92
14-40	2.3	5.8	154.95	45.11	19.02
45	2.3	7	154.95	45.11	15.59
50	2.3	8.4	154.95	45.11	13.14
55	2.3	9.6	154.95	45.11	11.47
60	2.3	10.9	154.95	45.11	10.17
65	2.3	12.9	154.95	45.11	8.53
70	2.3	14.2	154.95	45.11	7.75
75	2.3	15.3	154.95	45.11	7.16
80	2.3	16.7	154.95	45.11	6.57
85	2.3	18.6	154.95	45.11	5.91
90	2.3	20.1	154.95	45.11	5.21
100	2.3	21.1	154.95	45.11	4.82
125	2.3	28	154.95	45.11	3.92
16-50	2.6	7.5	195.15	55.9	18.63
55	2.6	9	195.15	55.9	15.49
60	2.6	10.4	195.15	55.9	13.34
65	2.6	11.9	195.15	55.9	11.67
70	2.6	13.4	195.15	55.9	10.4
75	2.6	15	195.15	55.9	9.32
80	2.6	16.5	195.15	55.9	8.45
90	2.6	19.4	195.15	55.9	7.16
100	2.6	22.4	195.15	55.9	6.18
125	2.6	28.4	195.15	55.9	4.9
150	2.6	35.5	195.15	55.9	3.92
18-55	2.9	8.3	236.34	68.65	20.1
60	2.9	10	236.34	68.65	16.67
65	2.9	11.6	236.34	68.65	14.71
70	2.9	12.5	236.34	68.65	13.44
75	2.9	14.1	236.34	68.65	11.77
80	2.9	15.8	236.34	68.65	10.79
90	2.9	18.4	236.34	68.65	9.12
100	2.9	21.6	236.34	68.65	7.75
125	2.9	27.1	236.34	68.65	6.19
150	2.9	34.2	236.34	68.65	4.9
20-60	3.2	9.2	281.45	82.38	21.57
70	3.2	11.9	281.45	82.38	16.67
75	3.2	14.7	281.45	82.38	13.53
80	3.2	17.5	281.45	82.38	11.38
90	3.2	20.1	281.45	82.38	9.9
100	3.2	23.8	281.45	82.38	7.16
125	3.2	33.8	281.45	82.38	5.89
150	3.2	40.6	281.45	82.38	4.9
24-80	4	11.7	430.51	123.6	26.48
90	4	13.7	430.51	123.6	22.46
100	4	16.6	430.51	123.6	18.63
125	4	22.5	430.51	123.6	13.63
150	4	28.5	430.51	123.6	10.79
175	4	34.4	430.51	123.6	8.92
200	4	41.2	430.51	123.6	7.45

负载(kgf)=负载N×0.101972

弹簧·氮气弹簧

32