

夹具衬套

防脱落型 直柱 带肩型



型号(1代码·2D) — (3P) — (4L)
DAAF68 — P4.10 — L11.0

■ 请按步骤①~④选择型号和参数后进行订购。




型号区分: 7天发货



代码		材质	表面处理	硬度
D尺寸p6	D尺寸m6			
DAAFPG	DAAF	SKS3	—	淬火硬度56~60HRC
DAAFPG	DAAF	SKS3	发黑	淬火硬度56~60HRC
DAAFMPG	DAAF	SKS3	无电解镀锌	淬火硬度56~60HRC
DAAFMPG	DAAF	SUS440C	—	淬火硬度50~55HRC
DAAFMPG	DAAF	SUS304	—	—

D	D公差	
	p6	m6
8	+0.024	+0.015
10	+0.015	+0.006
12	+0.029	+0.018
15	+0.018	+0.007
18		
20		
22	+0.035	+0.021
25	+0.022	+0.008
26		
30		
35	+0.042	+0.025
	+0.026	+0.009

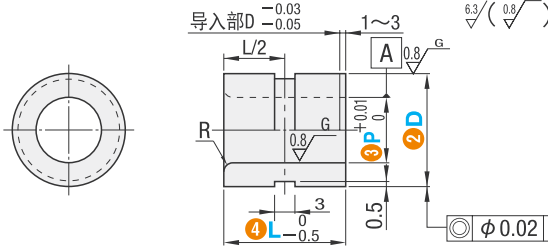

型号		②D	③P 最小单位0.01mm	④L 最小单位0.1mm	R
①代码	①代码				
(p6)	(m6)	8	4.00~4.50	10.0~13.0	1.0
		10	4.00~6.50	10.0~20.0	1.0
		12	6.00~8.50	10.0~20.0	2.0
		15	8.00~10.50	10.0~40.0	2.0
		18	10.00~12.50	10.0~40.0	2.0
		20	12.00~13.50	10.0~40.0	2.0
		22	12.00~13.50	10.0~40.0	2.0
		25	13.00~15.50	10.0~40.0	2.0
		26	15.00~16.50	10.0~40.0	2.0
		30	16.00~20.50	12.0~60.0	3.0
		35	20.00~25.00	12.0~60.0	3.0

① L ≤ P × 3.0



型号(1代码·2D) — (3P) — (4L)
DAHG20 — P13.00 — L20.0


■ 请按步骤①~④选择型号和参数后进行订购。



型号区分: 8天发货



代码			材质	表面处理	硬度
D尺寸p6	D尺寸m6	D尺寸h6			
DAHFPG	DAHFG	DAHG	SKS3	—	淬火硬度56~60HRC
DAHFPG	DAHFG	DAHG	SKS3	无电解镀锌	淬火硬度56~60HRC
DAHFCPG	DAHFCG	—	SUS440C	—	淬火硬度50~55HRC

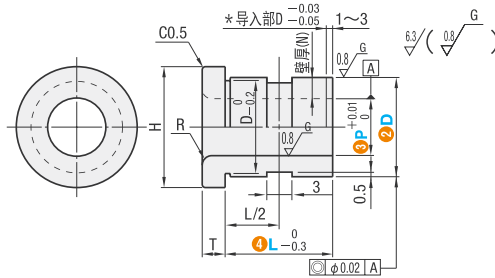

D	D公差		
	p6	m6	h6
8	+0.024	+0.015	0
10	+0.015	+0.006	-0.009
12	+0.029	+0.018	0
15	+0.018	+0.007	-0.011
18			
20			
22	+0.035	+0.021	0
25	+0.022	+0.008	-0.013
26			
30			
35	+0.042	+0.025	0
	+0.026	+0.009	-0.016

型号		②D	③P 最小单位0.01mm	④L 最小单位0.1mm	壁厚(N)	R	H	T	⑤HC 可选加工
①代码	①代码								
(p6)	(m6)	8	4.00~4.50	8.0~10.0	1.75~2.50	1.0	12	3	型号(1代码·2D) — (3P) — (4L) — (HC) DAAFPG15 — P8.00 — L15.0 — HC 变更止动螺丝部深度 止动螺丝部的深度由0.5mm变更为1.0mm。 [指定方法] HC ① 仅防脱落直柱型适用 ② D尺寸大于18时适用
		10	4.00~6.50	8.0~15.0	1.75~3.00	1.0	14	3	
		12	6.00~8.50	8.0~15.0	1.75~3.00	2.0	16	4	
		15	8.00~10.50	10.0~35.0	2.25~3.50	2.0	19	4	
		18	10.00~12.50	10.0~35.0	2.75~4.00	2.0	22	4	
		20	12.00~13.50	10.0~35.0	3.25~4.00	2.0	26	5	
		22	12.00~13.50	10.0~35.0	4.25~5.00	2.0	26	5	
		25	13.00~15.50	10.0~35.0	4.75~6.00	2.0	30	5	
		26	15.00~16.50	10.0~35.0	4.75~5.50	2.0	30	5	
		30	16.00~20.50	12.0~50.0	4.75~7.00	3.0	35	6	
		35	20.00~25.00	12.0~50.0	5.00~7.50	3.0	40	6	

① L + T ≤ P × 3.0

定位销
夹具衬套

20