



型号(①代码·②d) — ③L  
DAHUS — 8

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: ④ 7天发货  
代码


■ 薄壁型



代码		材质	表面处理	硬度
D尺寸p6	D尺寸m6			
DAHUP	DAHU	SUU2 或	—	淬火硬度58HRC~
DAHUNP	DAHUN	SKS3	无电解镀镍	淬火硬度58HRC~
DAHUCP	DADXSS	SUS440C	—	淬火硬度50~55HRC

25 / ( 6.3 / 0.4 ) G

d	d公差	
	无表面处理	无电解镀镍
3	+0.008 +0.002	+0.010 0
4	+0.012 +0.004	+0.012 0
5		
6		
8	+0.014 +0.005	+0.014 +0.005
10		
12	+0.017 +0.006	+0.017 +0.006
13		
15		
16		
20		
25	+0.020 +0.007	+0.020 +0.007

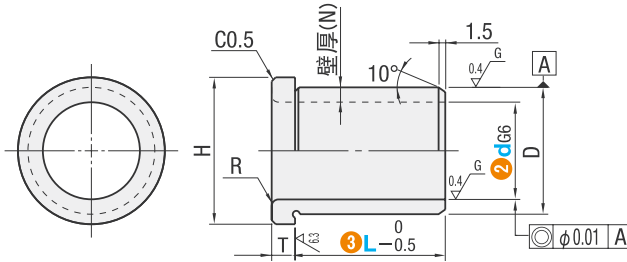

D	D公差	
	p6	m6
5	+0.020	+0.012
6	+0.012	+0.004
7	+0.024 +0.015	+0.015 +0.006
8		
10	+0.029 +0.018	+0.018 +0.007
13		
15		
17	+0.035 +0.022	+0.021 +0.008
19		
21	+0.042 +0.026	+0.025 +0.009
26		
31		

①无电解镀镍产品的d尺寸3~6的公差为H7。

型号		③L选择					D	H	壁厚(N)	T	R	
①代码	②d	3	4	5	6	7						
<p6> DAHUP DAHUNP DAHUCP	<m6> DAHU DAHUN DADXSS	3	6	8	10	12	5	9	1	2.5	0.5	
		4	6	8	10	12	15	6	10	1	3	0.5
		5	6	8	10	12	15	7	11	1	3	0.5
		6	6	8	10	12	15	8	12	1	3	0.5
		8	6	8	10	12	15	10	14	1	4	0.5
		10	6	8	10	12	15	13	17	1.5	4	0.5
		12		8	10	12	15	15	19	1.5	4	0.5
		13			10	12	15	17	21	2	5	1
		15				12	15	19	24	2	5	1
		16					12	21	26	2.5	5	2
20						26	31	3	6	2		
25						31	36	3	6	2		