



型号 (①代码·②B) — ③T
 (T尺寸固定型) DBSSTE17
 (T尺寸指定型) DBSTFN19 — 19.5

■请按步骤①~③选择型号和参数后进行订购。




型号区分: ④代码 7天发货

■ 螺纹型



T尺寸	代码	材质	硬度	表面处理
固定型	DBSTEN	SCM435	46~50HRC	无电解镀镍
	DBSSTE	SUS440C	50~55HRC	—
指定型	DBSTFN	SCM435	32~38HRC	无电解镀镍
	DBSSTF	SUS440C	40~45HRC	—

$\sqrt{6.3}/(\sqrt{0.8}/\sqrt{0.8})^G$

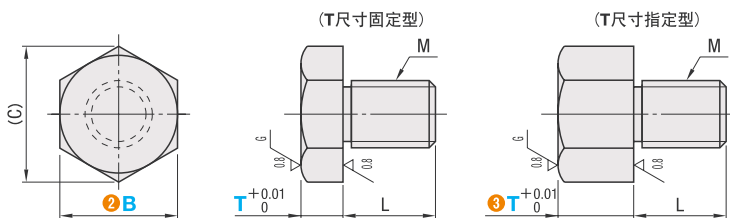

■ T尺寸固定型

型号	②B	T	M (粗牙螺纹)	L	(C)	
DBSTEN (35CrMo)	5.5A	3	3	5	6.4	
	5.5	5	4	8.1	11.5	
	7		4	8.1		
	8		5	9.2		
	10	8	6	9	15	
	10B		6	9		
	13	5	8	10	16.2	
	13A	8	10	12		
	DBSSTE (9Cr18)	13B	5	10	12	19.6
		14		10	12	
14A		8	10	15		
14B		8	10			
17		5	10	15		
17A		8	10			
17B		5	12	21.9		
19		8	12		18	

■ T尺寸指定型

型号	②B	③T 单位0.5mm	M (粗牙螺纹)	L	(C)
DBSTFN (SCM435)	5.5	2.0~10.0	3	5	6.4
	7		4	8.1	
	8		5	9.2	
	10	6	11.5		
	DBSSTF (SUS440C)	13	5.0~30.0	8	10
14		10		16.2	
17		10	12	19.6	
19		12	15	21.9	



型号 (①代码·②D)
 DBSTM16

■请按步骤①~②选择型号和参数后进行订购。




型号区分: ④代码 7天发货

■ 压入型



代码	材质	硬度	表面处理
DBSTM	S45C	46~50HRC	无电解镀镍
DBSSTM	SUS440C	50~55HRC	—



型号	②D	d _{m6}	L	T
DBSTM (S45C)	5	3	5	5
	5A		7	3
	5B		5	3
	6	4	6	5
	6A		9	3
6B	6	3		
DBSSTM (SUS440C)	8	5	8	5
	8A		12	3
	8B	8	3	
	10	6	12	5
	10A		8	3
	10B	8	3	
	12	8	10	5
	12A		15	
	16		10	
	16A		15	
18	10	12	5	
18A		15		
20	12	16	5	
20A		24		