



型号(1代码·2M) — 3 L选择
DBAH8 — 20

■请按步骤①~③选择型号和参数后进行订购。




型号区分: 代码 7 天发货

调整螺丝组件

—六角螺栓型—



调整螺丝	代码	材质	硬度	表面处理	附件(1个螺帽)	
					材质	表面处理
细牙螺纹	DBAH	SCM435	40~45HRC	光泽镀锌	SS400	镀锌
	DBSAH	SUS410	40~45HRC	—	SUS304	—
粗牙螺纹	DBAHN	SCM435	40~45HRC	光泽镀锌	SS400	镀锌
	DBAHNS	SUS304	—	—	SUS304	—
	DBSAHN	SUS410	40~45HRC	—	—	—

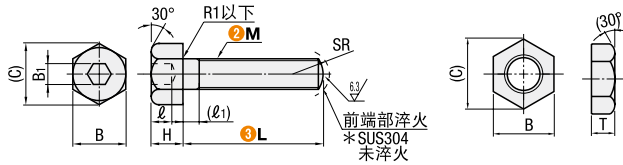

定位导向零件 21


型号		③ L选择										M×螺距		T		B	(C)	B ₁	H	ℓ	(ℓ ₁)	SR	
① 代码	② M											细牙螺纹	粗牙螺纹	细牙螺纹	粗牙螺纹								
(细牙螺纹)	3	15	20	25	30	35	40	—	3×0.5	—	2.4	5.5	6.4	1.5	2	0.7	3	3					
DBAH	4	15	20	25	30	35	40	4×0.5	4×0.7	3.2	7	8.1	2.5	2.8	1.3	3	4						
DBSAH	5	15	20	25	30	35	40	5×0.5	5×0.8	4	8	9.2	3	3.5	2	3	5						
(粗牙螺纹)	6	20	25	30	35	40	6×0.75	6×1.0	5	10	11.5	4	4	2.5	5	6							
DBAHN	8	25	30	35	40	45	50	60	8×0.75	8×1.25	5	6.5	13	15	5	5.5	3	5	8				
DBAHNS	10	30	35	40	45	50	60	70	10×1.0	10×1.5	6	8	17	19.6	6	7	4	5	10				
DBSAHN	12	35	40	45	50	60	70	80	12×1.0	12×1.75	6	10	19	21.9	8	8	5	10	12				
① DBAHNS 为M3~12	16	40	45	50	60	70	80	100	16×1.5	16×2.0	8	13	24	27.7	10	10	6	10	16				
	20	45	50	60	70	80	100	120	20×1.5	20×2.5	10	16	30	34.6	14	13	7.4	10	20				

⊗M3不适用于细牙螺纹 DBAH· DBSAH。

止动螺丝



代码	材质	硬度	表面处理
DBSSCC	SCM435	40~45HRC	发黑
DBSSNCC			无电解镀锌
DBSSCC	SUS420J2	—	—

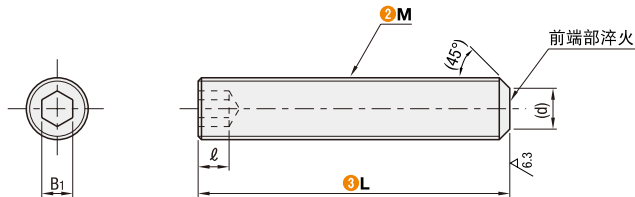

型号		③ L选择										M×螺距		B ₁	ℓ	(d)
① 代码	② M											细牙螺纹	粗牙螺纹			
DBSSCC DBSSNCC DBSSCC	4	20	25	30	35	40	4×0.5	2	2.5	2.5						
	5	20	25	30	35	40	5×0.5	2.5	3	3.5						
	6	30	35	40	45	50	60	6×0.75	3	3.5	4					
	8	30	35	40	45	50	60	8×0.75	4	5	4.5					
	10	40	45	50	60	70	10×1.0	5	6	7						
	12	40	45	50	60	70	80	12×1.0	6	8	8.5					