


型号(①代码·②齿数)
CBATFW22— ③对应皮带
MXL050— ④轴径
3

■请按步骤①~④选择型号和参数后进行订购。

型号区分:
代码

7 天发货

■两侧轴承型

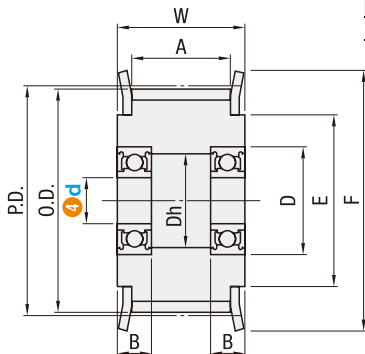

型号	材质			表面处理
	主体	法兰	轴承	
CBATFW	铝合金	铝合金	钢	本色阳极氧化处理

①轴承采用压入方式。

■MXL型

① 代码	型号		③ 对应皮带	④ 轴径 d	P.D.	O.D.	F	E	A	W	Dh	轴承尺寸		
	② 齿数	② 齿数										No.	D	B
CBATFW	16	MXL019	3	10.35	9.84	14	8	6	10	5	673ZZ×2	6	2.5	
	20	MXL019	3	12.94	12.43	18	11	6	10	5	673ZZ×2	6	2.5	
	22	MXL025	3	14.23	13.72	18	11	7.5	11.5	5	673ZZ×2	6	2.5	
		MXL037						11	15					
		MXL050						14	18					
	24	MXL025	4	15.52	15.02	20	13	7.5	11.5	6	674ZZ×2	7	2.5	
		MXL037						11	15					
		MXL050						14	18					
	30	MXL019	4	19.4	18.9	25	16	6	10	6	674ZZ×2	7	2.5	
		MXL025						7.5	11.5					
		MXL037						11	15					
	36	MXL025	5	23.29	22.78	28	18	7.5	11.5	11	695ZZ×2	1 3	4	
		MXL037						11	15					
		MXL050						14	18					
	40	MXL025	5	25.87	25.36	30	20	7.5	11.5	11	695ZZ×2	1 3	4	
		MXL037						11	15					
		MXL050						14	18					
	50	MXL025	5	32.34	31.84	35	25	7.5	11.5	11	695ZZ×2	1 3	4	
		MXL037						11	15					
		MXL050						14	18					
	60	MXL025	5	38.81	38.3	44	32	7.5	11.5	11	695ZZ×2	1 3	4	
		MXL037						11	15					
		MXL050						14	18					

■XL型

① 代码	型号		③ 对应皮带	④ 轴径 d	P.D.	O.D.	F	E	A	W	Dh	轴承尺寸		
	② 齿数	② 齿数										No.	D	B
CBATFW	16	XL025	5	25.87	25.36	32	20	20	7.5	12.5	11	695ZZ×2	13	4
		XL031							9	1 4				
		XL037							11	16				
		XL050							14	19				
	18	XL037	6	29.11	28.6	36	24	24	11	16	13	696ZZ×2	1 5	5
		XL050							14	19				
	20	XL037	8	32.34	31.9	40	27	27	11	16	16.5	698ZZ×2	1 9	6
		XL050							14	19				
	22	XL037	8	35.57	35.07	45	30	30	11	16	16.5	698ZZ×2	1 9	6
		XL050							14	19				
	25	XL037	10	40.43	39.92	48	35	35	11	16	19.5	6900ZZ×2	2 2	6
		XL050							14	19				
	28	XL037	10	45.28	44.77	55	40	40	11	16	19.5	6900ZZ×2	2 2	6
		XL050							14	19				
	30	XL037	10	48.51	48	55	40	40	11	16	19.5	6900ZZ×2	2 2	6
		XL050							14	19				
	36	XL037	10	58.21	57.7	67	50	50	11	16	19.5	6900ZZ×2	2 2	6
		XL050							14	19				

型号(①代码·②齿数) — ③对应皮带 — ④轴径 — (FC·NFC·LFC·RFC)
CBATFW36 — MXL037 — 10 — LFC

可选加工	法兰切割	不铆接法兰	仅铆接单侧法兰
代码	FC	NFC	LFC·RFC
技术说明	切割法兰, 降低高度。 FC: 最小单位0.5mm ① 法兰外周未进行表面处理。 ② $FC \geq (O.D.) + 2$ ③ $FC \leq F - 2$ (指定方法) FC43	发货时不铆接法兰。 (附带法兰)	发货时仅铆接挡圈侧(RFC) 或挡圈相反侧(LFC)的单侧法兰。 (附带1个法兰)