



型号 (1 代码 · 2 M) — (3) L
DBABS — 40

■ 请按步骤 ① ~ ③ 选择型号和参数后进行订购。





型号区分: 7 天发货

调整螺丝组件

— 内六角孔型 —



调整螺丝	内六角孔型	材质	硬度	表面处理	附件 (1个螺帽)	
					材质	表面处理
细牙螺纹	DBABM	S45C	45~50HRC	无电解镀镍	SS400	镀锌
	DBAB					
	DBABH	SCM435	50HRC~	—	SUS304	—
	DBABS	SUS304	—			
	DBSAB	SUS420J2	45HRC~			
粗牙螺纹	DBABNM	S45C	45~50HRC	无电解镀镍	SS400	镀锌
	DBABN					
	DBABNH	SCM435	50HRC~	—	SUS304	—
	DBABS	SUS304	—			
	DBSABN	SUS420J2	45HRC~			

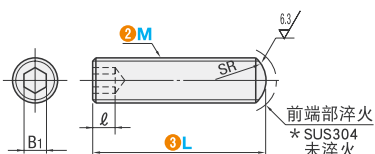

M	M×螺距		B ₁	ℓ	SR	B	(C)	T
	细牙螺纹	粗牙螺纹						
3	3×0.35	3×0.5	1.5	1.5	3	5.5	6.4	2.4
4	4×0.5	4×0.7	2	2.2	4	7	8.1	
5	5×0.5	5×0.8	2.5	2.8	5	8	9.2	4
6	6×0.75	6×1.0	3	3	6	10	11.5	
8	8×0.75	8×1.25	4	4	8	13	15	5
10	10×1.0	10×1.5	5	5	10	17	19.6	6
12	12×1.0	12×1.75	6	6	12	19	21.9	
16	16×1.5	16×2.0	8	7	16	24	27.7	8
20	20×1.5	20×2.5	10	8	20	30	34.6	10

型号		③ L 选择																		
① 代码	② M	3	10	15	20	25	30	35	40	45	50	60	70	80	90	100	120			
(细牙螺纹)	DBAB	3	10	15	20	25	30	35	40	45	50	60								
	DBABS	5	10	15	20	25	30	35	40	45	50	60								
	DBSAB	6	15	20	25	30	35	40	45	50	60									
(粗牙螺纹)	DBABN	10								25	30	35	40	45	50	60	70	80	90	100
	DBABNS	12								30	35	40	45	50	60	70	80	90	100	
	DBSABN	16								40	45	50	60	70	80	90	100	120		
	DBSABNS	20								45	50	60	70	80	90	100	120			

型号		③ L 选择																		
① 代码	② M	3	10	15	20	25	30	35	40	45	50	60	70	80	90	100	120			
(细牙螺纹)	DBABH	3	10	15	20	25	30	35	40	45	50	60								
	DBABNH	5	10	15	20	25	30	35	40	45	50	60								
	DBSABH	6	15	20	25	30	35	40	45	50	60									
(粗牙螺纹)	DBABNH	8								20	25	30	35	40	45	50	60	70	80	100
	DBSABNH	10								30	35	40	45	50	60	70	80	100		
	DBSABNSH	12								35	40	45	50	60	70	80	100			
	DBSABNSH	16								40	45	50	60	70	80	100				
	DBSABNSH	20								45	50	60	70	80	100	120				



型号		③ L 选择														
① 代码	② M	3	15	20	25	30	35	40	45	50	60	70	80	90	100	120
(细牙螺纹)	DBABM	3	15	20	25	30	35	40	45	50	60					
	DBABNM	4	15	20	25	30	35	40	45	50	60					
	DBABNSM	5	15	20	25	30	35	40	45	50	60					
(粗牙螺纹)	DBABNM	6	15	20	25	30	35	40	45	50	60					
	DBABNSM	8	20	25	30	35	40	45	50	60						
	DBSABNM	10				30	35	40	45	50	60	70				
	DBSABNSM	12				40	45	50	60	70						

调整螺丝组件

— 带扳手槽型 —



调整螺丝	带扳手槽型	材质	硬度	表面处理	附件 (1个螺帽)	
					材质	表面处理
细牙螺纹	DBAS	S45C	45~50HRC	镀锌	SS400	镀锌
	DBSAS	SUS420J2	45HRC~	—	SUS304	—
	DBASN	S45C	45~50HRC	镀锌	SS400	镀锌
粗牙螺纹	DBASN	SUS420J2	45HRC~	—	SUS304	—

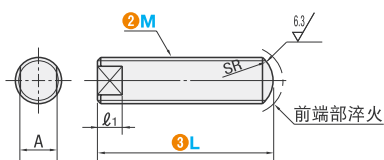

M	M×螺距		A	ℓ ₁	SR	B	(C)	T
	细牙螺纹	粗牙螺纹						
3	3×0.35	3×0.5	2.5	3	5.5	6.4	2.4	
4	4×0.5	4×0.7	3	4	7	8.1		
5	5×0.5	5×0.8	4	5	8	9.2	4	
6	6×0.75	6×1.0	5	5	6	10	11.5	
8	8×0.75	8×1.25	6	6	8	13	15	
10	10×1.0	10×1.5	8	8	10	17	19.6	
12	12×1.0	12×1.75	10	10	12	19	21.9	
16	16×1.5	16×2.0	14	14	16	24	27.7	
20	20×1.5	20×2.5	17	17	20	30	34.6	

型号		③ L 选择														
① 代码	② M	3	15	20	25	30	35	40	45	50	60	70	80	90	100	120
(细牙螺纹)	DBAS	3	15	20	25	30	35	40	45	50	60					
	DBSAS	4	15	20	25	30	35	40	45	50	60					
	DBASN	5	15	20	25	30	35	40	45	50	60					
(粗牙螺纹)	DBASN	6	20	25	30	35	40	45	50	60						
	DBSASN	8	25	30	35	40	45	50	60							
	DBSASN	10				30	35	40	45	50	60	70				
	DBSASNS	12				35	40	45	50	60	70	80				
	DBSASNS	16				40	45	50	60	70	80	100				
	DBSASNS	20				45	50	60	70	80	100	120				