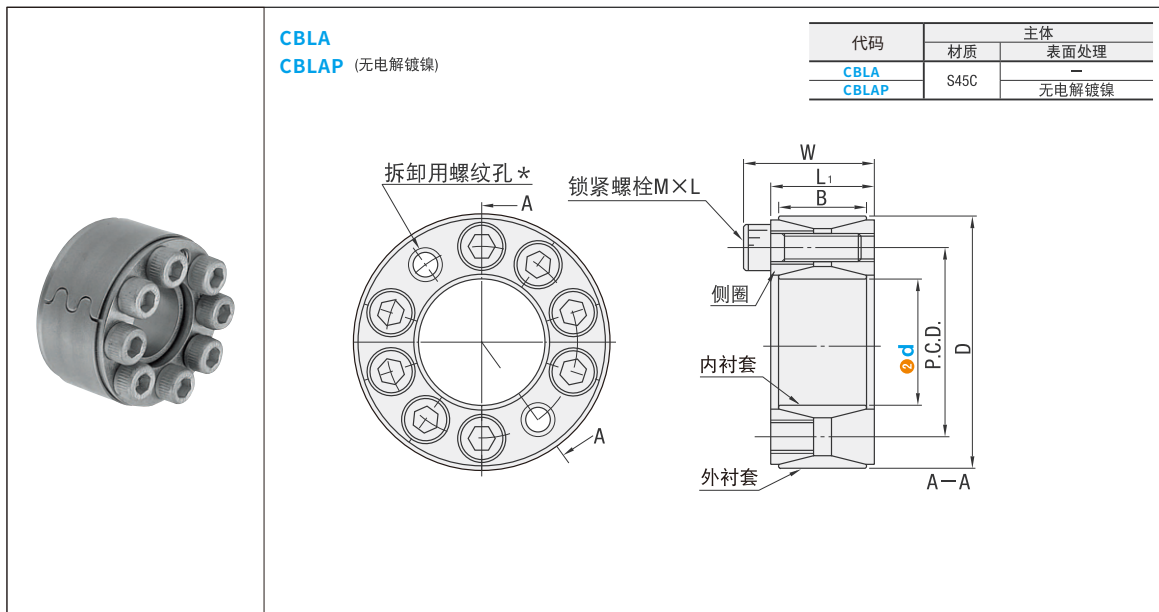


型号(①代码·②d)
CBLA30型号区分:
代码 7 天发货

型号		D	W	P.C.D.	L ₁	B	锁紧螺栓				重量 (g)	■ 免键轴衬容许输入负载的确认		
① 代码	② d						M×L	个数	内六角扳手 公称尺寸	紧固扭矩 (N·m)		d	容许最大扭矩 (N·m)	容许轴向负载 (kN)
CBLA CBLAP	20	47	26	34.5	20	18	M6×18	8	5	12.7	240	20	300	29.5
	22	34.5		230							22	330	29.5	
	24	50		37.5							250	24	410	33.8
	25			240							25	430	33.8	
	28	55		42.5				290			28	530	37.8	
	30			280				30			570	37.8		
	32	60	32	47.5				340			32	730	45.4	
	35			310				35			800	45.4		
	38	65		52.5				370			38	1010	52.9	
	40			350				40			1060	52.9		
	42	75		60	600	42		1560	74.1					
	45			570	45	1670		74.1						
	48	80		65	630	48		1780	74.1					
	50			610	50	1860		74.1						
	55	85		70	660	55		2530	91.8					
	60	90		75	700	60		2760	91.8					
	65	95		80	710	65		2990	91.8					

国际单位1N=0.102kgf

d	轴侧面 压力 MPa	轮孔部 侧面压力 MPa	使用1个时				轮孔 加工深度 L ₁	使用2个时				轮孔 加工深度 L ₂	
			H轮体最小外径					H轮体最小外径					
			轮体材料的屈服应力 (MPa)					轮体材料的屈服应力 (MPa)					
			147	206	294	392		147	206	294	392		
			FC250	FC350 SS400	FCD450 S55C	FCD600 S55C		FC250	FC350 SS400	FCD450 S55C	FCD600 S55C		
20	217	93	70	62	57	55	28	87	72	63	58	55	
22	198	93	70	62	57	55		83	69	62			
24	207	100	77	68	62	59		85	72	65			61
25	199	100	77	68	62	59							
28	199	101	86	75	68	65		98	82	72	67		
30	186	101	86	75	68	65							
32	209	111	98	84	76	72		115	93	81	75		
35	191	111	98	84	76	72		109	90	79	74		
38	205	120	112	94	84	79		126	101	88	81		
40	195	120	112	94	84	79							
42	223	125	132	110	98	91	34	159	123	105	96	67	
45	208	125	132	110	98	91		171	128	107	98		
48	195	117	135	115	103	96		170	131	112	102		
50	187	117	135	115	103	96		159	127	109	101		
55	211	136	160	130	114	106		200	147	123	111		
60	193	129	162	134	118	110		214	156	130	118		
65	178	122	165	138	123	115		211	159	134	123		

国际单位1N=0.102kgf