




### 六角型




代码		材质	表面处理
螺纹长度固定型	螺纹长度指定型		
<b>BDLAB</b>	<b>BDLNAB</b>	S45C	发黑
<b>BDPLAB</b>	<b>BDPLNAB</b>		
<b>BDSLAB</b>	<b>BDSLNAB</b>	SUS304	—

6.3 / (1.6 /)

螺纹长度固定型

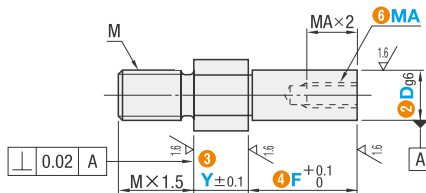


螺纹长度指定型

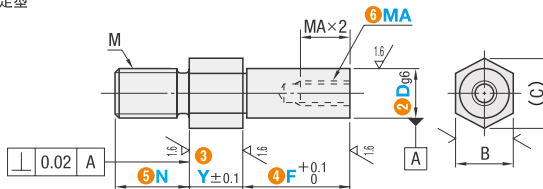

型号		最小单位 1mm			6MA (粗牙螺纹) 选择	B	(C)	M (粗牙螺纹)		
1 代码	2 Dg6	3 Y	4 F	5 N						
螺纹长度 固定型 <b>BDLAB</b> <b>BDPLAB</b> <b>BDSLAB</b>	6	2~60	5~100	6~12	3	8	9.2	M 6		
	8			8~16	4	10	11.5	M 8		
	10			10~20	4 5 6	13	15	M10		
螺纹长度 指定型 <b>BDLNAB</b> <b>BDPLNAB</b> <b>BDSLNAB</b>	12			10~100	12~24	5 6 8	5	14	16.2	M12
	15					6 8 10	6	17	19.6	

### ① 外螺纹退刀槽加工尺寸



粗牙螺纹			
螺纹直径 (M)	g	r	f
6	1.5~2.5	0.2~0.6	4.3~4.9
8			6.3~6.6
10			8.1~8.3
12	1.5~3.0	0.2~1.0	9.8~10.1