



# 定位销

## 大头锥角型 标准/P尺寸固定型



型号 (1) 代码 · (2) D) — (3) P选择  
 DABB6 — 10  
 DADB8 — 12

■ 请按步骤 1~3 选择  
 型号和参数后进行订购。



型号区分: **7** 天发货  
 代码




代码				材质	表面处理	硬度
圆型		多棱型				
D尺寸m6	D尺寸p6	D尺寸m6	D尺寸p6			
DABB	DABPB	DADB	DADPB	SKS3	—	淬火硬度60~63HRC
DAGBB	DAGBPB	DAGDB	DAGDPB	SKS3	镀硬铬 厚度3μm以上	淬火硬度50~55HRC 镀层硬度750HV~
DACBB	DACBPB	DACDB	DACDPB	SUS440C	—	淬火硬度50~55HRC
DASBB	DASBPB	DASDB	DASDPB	SUS304	—	—

6.3 / (0.4<sup>G</sup>)

### ■ D尺寸公差

D	m6	p6
1	+0.008	+0.012
2	+0.002	+0.006
3		
4		
5	+0.012	+0.020
6	+0.004	+0.012
8	+0.015	+0.024
10	+0.006	+0.015
12	+0.018	+0.029
13	+0.007	+0.018
16		
20	+0.021	+0.035
	+0.008	+0.022

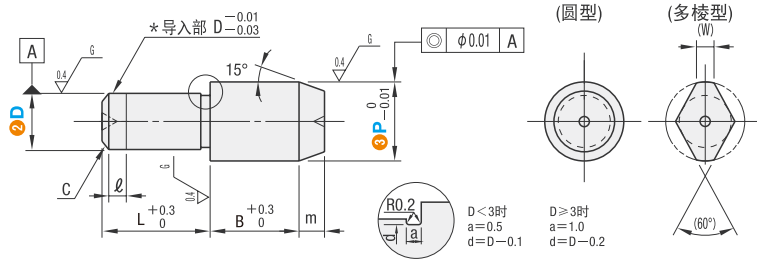

型号		P选择				L	B	m	l	C	(W)
1 代码	2 D	3 P选择									
	1 2					3	3	0.5	0	0.1	—
	2	3	4			4	3	1	0	0.5	1.2
	3		4	5	6	5	5	2	1	0.5	1.5
	4			5	6	5	6	3	1	1	1.8
	5				6	8	10	6	3	1	2.2
	6					8	10	8	3	1	3
	8						10	12	13	15	3.5
	10						15	10	4	1	2
	12						15	10	4	1	2
	13						22	10	4	2	5.5
	16						22	10	5	2	3
	20						20	25			
							25	30			

① 适用于D≥2

定位销  
夹具衬套

20