



小零件/磁铁

- 直锥形正/负公差定位销
- 弹簧销/定位销拉拔器

新增



型号(1代码·2D) — 3L
DAXWSSR3 — L10

■ 请按步骤①~⑥选择型号和参数后进行订购。




型号区分: 7天发货

直锥形正/负公差定位销



代码	类型	公差	材质	硬度
DAXWSSR DAXTSSR	锥角型	m6 g6	SUS440C	48-52HRC

※仅m6公差有导入部。

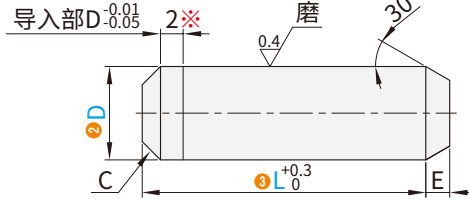

1 代码	2 D	D公差		3 L	E	C
		DAXWSSR	DAXTSSR			
DAXWSSR DAXTSSR	3	+0.008	-0.002	10	1	0.5
		+0.002	-0.008	15		
	4	+0.012	-0.004	10	1.5	
		+0.004	-0.012	15		
				20		
	5	+0.012	-0.004	10	2	
		+0.004	-0.012	15		
	6	+0.012	-0.004	10		
+0.004		-0.012	15			
8	+0.015	-0.005	20			
	+0.006	-0.014	20			



型号(1代码·2D) — 3L
EAPRS — 40

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: 5天发货


弹簧销





L	L尺寸公差
5~10	+0.5 0
12~50	+1.0 0
56~100	+1.5 0

代码	材质	硬度
EAPR	弹簧钢	45~50HRC
EASPSR	不锈钢弹簧钢	42~48HRC

EAPR

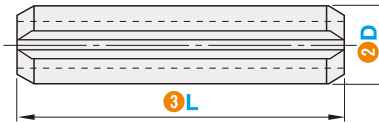

EASPSR
(不锈钢)

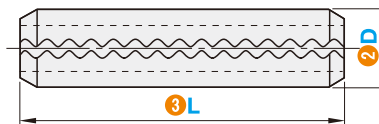

1 代码	2 D	3 L	*kN		t(参考)		D	
			EAPR	EASPSR	EAPR	EASPSR	min	max
EAPR (D2~10)	2	5 6 8 10 12 14 16 18 20	2.76	2.76	0.4	0.4	2.15	2.25
	3	6 8 10 12 14 16 18 20 22 25 28 32	6.2	6.2	0.6	0.6	3.15	3.25
	4	8 10 12 14 16 18 20 22 25 28 32 36 40	10.8	10.8	0.8	0.8	4.2	4.4
	5	10 12 14 16 18 20 22 25 28 32 36 40 45 50	17.25	17.25	1	1	5.2	5.4
EASPSR (D2~6)	6	12 14 16 18 20 22 25 28 32 36 40 45 50 56	24.83	24.83	1.2	1.2	6.2	6.4
	8	16 18 20 22 25 28 32 36 40 45 50 56 63 70 80	44.13	—	1.6	—	8.3	8.6
	10	18 20 22 25 28 32 36 40 45 50 56 63 70 80 90 100	68.94	—	2	—	10.3	10.6