



定位导向零件

调整螺丝组件 内六角孔扳手槽型



型号(1代码·2M) — 3 L选择
DBHAS8 — 25


■请按步骤①~③选择型号和参数后进行订购。



型号区分: 7天发货
代码

调整螺丝组件 —内六角孔扳手槽型—

调整螺丝	代码	材质	硬度	表面处理	附件(1个螺帽)	
					材质	表面处理
细牙螺纹	DBHAS	S45C	45~50HRC	镀锌	SS400	镀锌
	DBSHAS	SUS420J2	45HRC~	—	SUS304	—
粗牙螺纹	DBHAB	S45C	45~50HRC	镀锌	SS400	镀锌
	DBSHAB	SUS420J2	45HRC~	—	SUS304	—

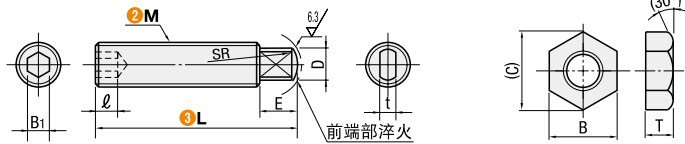

定位导向零件
21

1 代码	型号		3 L选择				M×螺距		B1	l	E	D	SR	t	B	(C)	T
	2 M	代码					细牙螺纹	粗牙螺纹									
(细牙螺纹)	4	15 20 25 30	4×0.5	4×0.7	2	2.2	4	3	4	2.5	7	8.1	4	10	11.5	15	19.6
DBHAS	5	15 20 25 30 40	5×0.5	5×0.8	2.5	2.8	4	4	5	3	8	9.2					
DBSHAS	6	20 25 30 40 50	6×0.75	6×1.0	3	3	5	4.5	6	3	10	11.5	5	13	17	21.9	
(粗牙螺纹)	8	25 30 40 50	8×0.75	8×1.25	4	4	6	6	8	4	13	15					
DBHAB	10	30 40 50 60	10×1.0	10×1.5	5	5	8	8	10	6	17	19.6	6	19	21.9		
DBSHAB	12	40 50 60	12×1.0	12×1.75	6	6	10	9	12	7	19	21.9					