



型号(①代码·②D) — ③T
CDGB15 — 6

■请按步骤①~③选择型号和参数后进行订购。



型号区分: ④代码 7天发货





代码		材质	表面处理	材质 轴承	附件
法兰型	圆弧型				
CDGB	CDGC	S45C	发黑	钢	挡圈 (SUS304)
CDGM	CDGM		无电解镀锌		
CDGA	CDGA		本色阳极氧化处理		

法兰型

圆弧型

$$\frac{6.3}{\sqrt{\left(\frac{16}{\sqrt{\quad}}\right)}}$$

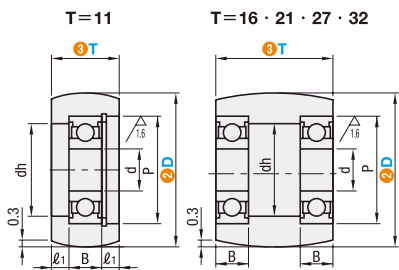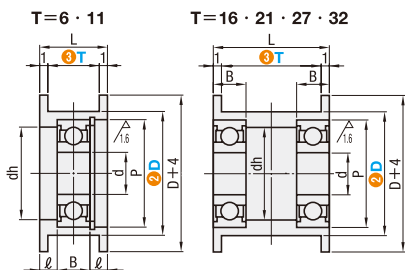

①T的公差精度为±0.2, 请确认平皮带宽度公差后选择惰轮型号。

型号 ①代码	②D	③T	P	dh	l	L	使用轴承		
							No.	d	B
法兰型 CDGB CDGM CDGA	15	6	11	9	2	8	694ZZ×1	4	4
	20		16	13	1.5	8	625ZZ×1	5	5
	20	11	16	13	4	13	625ZZ×1	5	5
	25		19	16	3.5	13	626ZZ×1	6	6
	30	19	17	3.5	13	698ZZ×1	8	6	
	15	16	11	9	—	18	685ZZ×2	5	5
	20		16	13	—	18	625ZZ×2	5	5
	25	21	19	16	—	18	626ZZ×2	6	6
	30		19	17	—	18	698ZZ×2	8	6
	35	27	26	23	—	18	6000ZZ×2	10	8
	40		26	23	—	18	6900ZZ×2	10	8
	15	32	11	9	—	23	685ZZ×2	5	5
	20		16	14	—	23	688ZZ×2	8	6
	25	21	19	17	—	23	698ZZ×2	8	6
	30		19	17	—	23	698ZZ×2	8	6
	35	27	26	23	—	23	6000ZZ×2	10	8
	40		26	23	—	23	6000ZZ×2	10	8
	50	32	28	25	—	23	6001ZZ×2	12	8
	15		11	9	—	29	685ZZ×2	5	5
	20	21	16	14	—	29	688ZZ×2	8	6
	25		19	17	—	29	698ZZ×2	8	6
	30	27	26	23	—	29	6000ZZ×2	10	8
	40		26	23	—	29	6001ZZ×2	12	8
	50	32	28	25	—	29	6001ZZ×2	12	8
	15		11	9	—	34	685ZZ×2	5	5
	20	21	16	14	—	34	688ZZ×2	8	6
	25		19	17	—	34	698ZZ×2	8	6
	30	27	26	23	—	34	6000ZZ×2	10	8
40	26		23	—	34	6000ZZ×2	10	8	
50	32	28	25	—	34	6001ZZ×2	12	8	

型号 ①代码	②D	③T	P	dh	l	L	使用轴承		
							No.	d	B
圆弧型 CDGC CDGM CDGA	20	11	16	16	3	13	625ZZ×1	5	5
	25		19	19	2.5	13	626ZZ×1	6	6
	30		19	19	2.5	13	698ZZ×1	8	6
	15	16	11	11	—	18	685ZZ×2	5	5
	20		16	16	—	18	625ZZ×2	5	5
	25	21	19	19	—	18	626ZZ×2	6	6
	30		19	19	—	18	698ZZ×2	8	6
	35	27	22	17	—	18	6900ZZ×2	10	6
	40		22	17	—	18	6900ZZ×2	10	6
	15	32	11	9	—	23	685ZZ×2	5	5
	20		16	14	—	23	688ZZ×2	8	6
	25	21	19	17	—	23	698ZZ×2	8	6
	30		19	17	—	23	698ZZ×2	8	6
	35	27	26	23	—	23	6000ZZ×2	10	8
	40		26	23	—	23	6000ZZ×2	10	8
	50	32	28	25	—	23	6001ZZ×2	12	8
	15		11	9	—	29	685ZZ×2	5	5
	20	21	16	14	—	29	688ZZ×2	8	6
	25		19	17	—	29	698ZZ×2	8	6
	30	27	26	23	—	29	6000ZZ×2	10	8
	40		26	23	—	29	6001ZZ×2	12	8
	50	32	28	25	—	29	6001ZZ×2	12	8
	15		11	9	—	34	685ZZ×2	5	5
	20	21	16	14	—	34	688ZZ×2	8	6
	25		19	17	—	34	698ZZ×2	8	6
	30	27	26	23	—	34	6000ZZ×2	10	8
	40		26	23	—	34	6000ZZ×2	10	8
	50	32	28	25	—	34	6001ZZ×2	12	8



型号(①代码·②D) — ③T — (FC·KLC·KFC·TC)
CDGB15 — 6 — KFC

可选加工 代码	法兰切割 FC	单侧切割法兰 KLC	单侧无法兰 KFC	变更法兰厚度 TC
技术说明	切割法兰, 降低高度。 FC: 指定单位0.5mm <p>①D ≤ FC < D+4 [指定方法] FC30.5 ⊗圆弧型不适用</p>	降低单侧法兰 高度。 ⊗圆弧型不适用 ⊗不可与追加加工KFC并用	去除图中右侧的法兰。 <p>⊗圆弧型不适用 ⊗不可与追加加工KLC并用 ①指定切割法兰与单侧无法兰时, 请同时使用FC与KFC。</p>	将法兰厚度加工为0.5。 L尺寸缩短1mm。 <p>⊗圆弧型不适用</p>

平
滑
皮
带
·
惰
轮
皮
带