



型号(1代码·2D) — 3L
L BBSO8 — 40

■请按步骤①~③选择型号和参数后进行订购。



型号区分: 5天发货
代码

■槽型


■使用时可将拉伸弹簧的挂钩勾在支柱的孔或槽中。

代码	材质	表面处理	附件材质
L BBSO L BBSOZ	S45C	发黑	1个螺帽(JIS1种) SW1CH
L BBSOZ L BBSOZ	SUS303	-	1个螺帽(JIS1种) SUS304


√(25/)



ℓ尺寸固定型
L BBSO
L BBSOZ
(不锈钢)

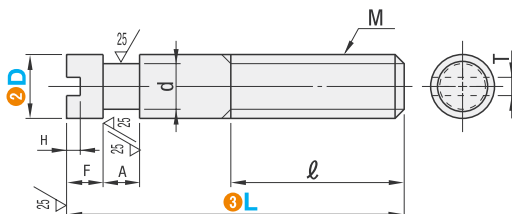

颈部全螺纹型
L BBSOZ
L BBSOZ
(不锈钢)

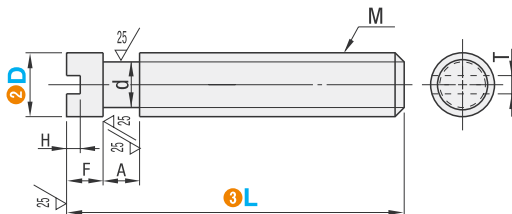

型号		3L	M (粗牙螺纹)	ℓ*	A	F	H	T	d
1 代码	2 D								
ℓ尺寸固定型 L BBSO L BBSOZ	3	15 20 25 30	M3	10	1	3	1	1.2	1.8
	4	15 20 25 30 35	M4		1.2				2
	5	*15 20 25 30 35 40	M5	2	3				
	6	*20 25 30 35 40	M6	16	4	2	3.6		
	8	*20 *25 30 35 40	M8	20	3	2.5	5		

①关于规格表带*符号的尺寸, ℓ尺寸为右表的尺寸。

型号		3L	M (粗牙螺纹)	A	F	H	T	d
1 代码	2 D							
颈部全螺纹型 L BBSOZ L BBSOZ	3	10 15 20 25	M3	1	3	1	1.2	1.8
	4	10 15 20 25 30	M4	1.2				2
	5	15 20 25 30 35	M5	2	3			
	6	20 25 30 35	M6	3	4	2		3.6
	8	25 30 35	M8		2.5	5		