



型号(1代码·2D) — (3)L
EAFW10 — 35

■ 请按步骤①~③选择型号和参数后进行订购。




型号区分: 代码 7 天发货


■ 台阶定位销
标准型·螺紋型



EAFW
EAFWC (不锈钢)



EAFWM (螺紋型)
EAFWCM (不锈钢螺紋型)

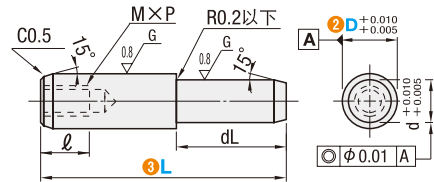

代码		材质	硬度
EAFW	EAFWM	SUU2	58HRC~
EAFWC	EAFWCM	SUS440C	

型号		③L	M×P	ℓ	d	dL
① 代码	②D					
EAFW EAFWC (不锈钢)	5	15	—	—	4	5 10
		25	—	—	4	10
EAFWM (螺紋型)	6	20	—	—	5	10 15
		30	3×0.5	6	5	15
EAFWCM (不锈钢螺紋型)	8	25	—	—	6	10 15
		35	4×0.7	8	6	15
EAFWCM (不锈钢螺紋型)	10	35	—	—	8	15 15
		40	5×0.8	—	8	15
	13	45	—	—	10	20 25
		55 70	6×1.0	10	10	25 30



型号(1代码·2D) — (3)L
EAIP6 — 10

■ 请按步骤①~③选择型号和参数后进行订购。




型号区分: 代码 7 天发货

■ 绝缘定位销



EAIP

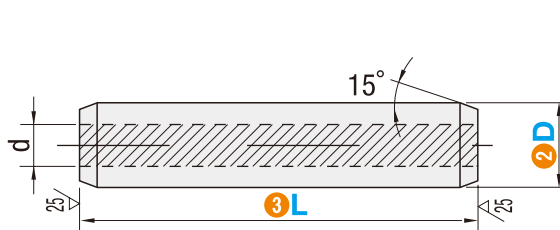

6.3/(25/√)

主体:胶木
金属芯:SUS304

型号		D公差	d	③L
① 代码	②D			
EAIP	6	+0.03 0	3	8 10 15 20 25 30 35 40
	8		4	10 15 20 25 30 35 40
	9		5	15 20 25 30 35 40 45 50
	10		6	15 20 25 30 35 40 45 50
	12		6	20 25 30 35 40 45 50