



型号(1代码·2M—螺距) — (3T) — (4L)
 FCJDL10 — 1.5 — 8 — 20
 FCJCM4 — 0.7 — 4

■ 请按步骤①~④选择型号和参数后进行订购。




型号区分: 代码 **7** 天发货

自由指定型



代码	材质	表面处理	表面硬度
FCJDL	S45C	镀硬铬	50HRC~

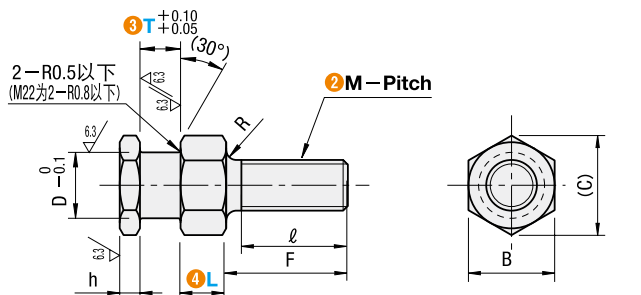


型号		3T 选择		4L 最小单位1mm	h	D	F	l	B	(C)	R
1代码	2M—螺距										
FCJDL	3-0.5	3	4	3~15	3	4	8	6	6	6.9	1
	4-0.7	3	4 5 6 8	3~20		6	13	11	8	9.2	
	5-0.8	3	4 5 6 8 9 10	3~25		7	19	17	10	11.5	1.5
	6-1.0	4	5 6 8	4~30		10	20	18	14	16.2	
	8-1.25	5	6 8 12	4~40	4	13	24	21	17	19.6	2
	10-1.5	6	8 9 10 12	4~50		21	40	37	26	30	
	16-2.0	12	20	8~80		5	25	50	46	30	34.6
	20-2.5	15	20	10~100		6	27	60	56	32	36.9
	22-2.5	12	15 20	10~100							
			12	15 20		10~100					

圆型



代码	材质	表面处理	表面硬度
FCJCLM	S45C	镀硬铬	50HRC~

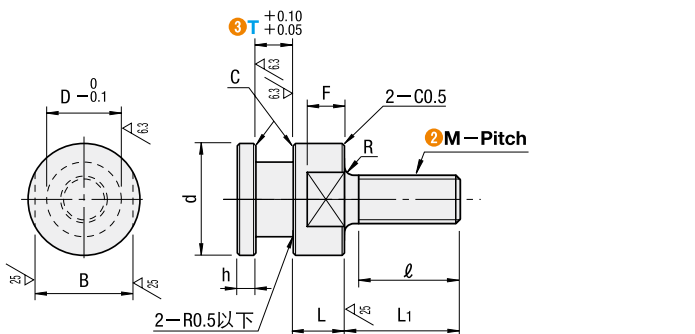

型号		3T 选择		h	D	d	L	F	L1	l	B	R	C	对应的固定座		
1代码	2M—螺距													FCJCLM T尺寸	FCLRB □	
FCJCLM	4-0.7	3	4	3	4	14	6	4	11	9	10	1.5	0.2	4	FCLRB4	
	5-0.8	4	5 6		6	7	5	13	11	12	FCLRB6					
	6-1.0	4	6		7	16	8	6	19	17	14	FCLRB7				
	8-1.25	6	8		10	20	9	7	20	18	17	6	FCLRB10			
	10-1.5	8	4	13	24	11	8	24	21	21	8	FCLRB13				
	16-2.0	12		21	35	13	11	35	32	30	12	FCLRB21				
	20-2.5	15		21	35	13	11	35	32	30	8	FCLRB21				
				15	25	40	15	13	40	37	36	15	FCLRB25			