


螺钉-六角头螺栓-全螺纹 (树脂)

代码	标准	标准名称	材质	级别	表面处理
MPG5783R10POAF	GB5783	六角头螺栓-全螺纹	树脂PPS	-	本色
MPG5783R20POAF			树脂RENY	-	本色

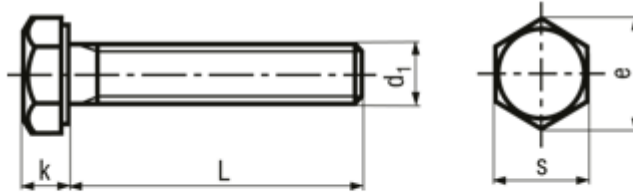

单位: mm

代码		d1	k	s	e	L																																													
MPG5783R10POAF MPG5783R20POAF	M2	1.4	4	4.32	5	6	8	10	12	16	20																																								
	M3	2	5.5	6.01	5	6	8	10	12	16	20	25																																							
	M4	2.8	7	7.66	6	8	10	12	16	20	25	30	35	40																																					
	M5	3.5	8	8.79	6	10	12	16	20	25	30	40																																							
	M6	4	10	11.05	8	10	12	16	20	25	30	35	40	45	50	60	70																																		
	M8	5.3	13	14.38	10	16	20	25	30	35	40	50	60	70	75	80	85	90	95	100																															
	M10	6.4	16	17.77	20	25	30	35	40	50	60	65	70	75	80	85	90	95	100																																
	M12	7.5	18	20.03	20	25	30	35	40	50	60	65	70	75	80	85	90	100	150																																
	M14	8.8	21	23.36	25	30	40	45	50	55	60	65	70	75	80	85	90	95	100	110	120	130	140	150																											
	M16	10	24	26.75	40	50	60	70	80	90	100	120	130	140	150	160	170	180	190	200																															
	M18	11.5	27	30.14	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200																														
	M20	12.5	30	33.53	50	60	70	80	90	100	110	120	130	140	150																																				
	M27	17	41	45.2	50																																														

震坤行工业超市(上海)有限公司

上海市虹桥商务区申滨路 36 号丽宝广场 T4 座 4F-7F/上海浦东科苑路 399 号 5 号楼|电话 400-680-9696|传真 021-50801998

*本文件包含震坤行知识产权, 未经书面授权, 不允许任何形式的复印和传播