



型号(1) 代码·(2) D — (3) Y — (4) F — (5) G — (6) N
 BDFDA12 — 12 — F15 — G6 —
 BDFNCA10 — 25 — F30 — G10 — N10

■请按步骤①~⑥选择型号和参数后进行订购。






型号区分: 代码 **7** 天发货

■标准型



代码		材质	表面处理
螺纹长度固定型	螺纹长度指定型		
BDFCA	BDFNCA	S45C	发黑
BDFPCA	BDFPNCA		无电解镀锌
BDSFCA	BDSFNCA		—
BDFHCA	—	SCM435 硬度35~40HRC	发黑

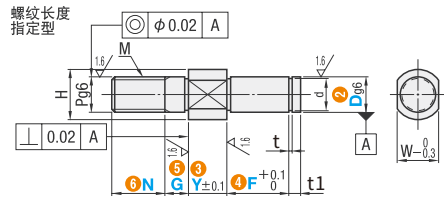



型号		最小单位 1mm				Pg6	M (粗牙螺纹)	H	W	d		t	t1	
① 代码	② Dg6	③ Y	④ F	⑤ G	⑥ N					基准尺寸	公差			
螺纹长度 固定型 BDFCA BDPFCA BDSFCA BDHFCA	3	-0.002 -0.008	2~30	3~50	3~8	3~6	3	M3	7	5	2	+0.060 0	0.5 0.7 0.9 1.15	2
	4	-0.004 -0.012				4~8	4	M4	8	6	3	+0.075 0		
	5					5~10	5	M5	9	7	4			
	6					6~12	6	M6	10	8	5			
螺纹长度 指定型 BDFNCA BDPFNCA BDSFNCA	8	-0.005 -0.014	2~60	5~100	5~10	8~16	8	M8	12	10	7	+0.090 0 -0.090	3	
	10	-0.006 -0.017				10~20	10	M10	15	13	9.6	0 -0.110		
	12					10~100	5~15	12~24	12	M12	17		14	11.5
15										20	17	14.3		

■台阶型



代码	材质	表面处理
BDFDA	S45C	发黑
BDFPDA		无电解镀锌
BDSFDA	SUS304	—

6.3 / (1.6 /)

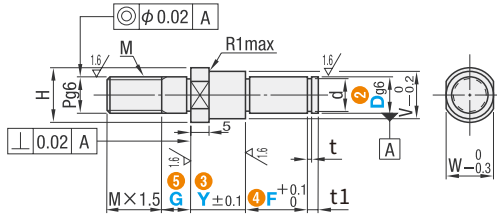

型号		最小单位 1mm			Pg6	M (粗牙螺纹)	V	H	W	d		m	n						
① 代码	② Dg6	③ Y	④ F	⑤ G						基准尺寸	公差								
BDFDA BDPFDA BDSFDA	3	-0.002 -0.008	7~30	3~50	3~8	3	M3	5	7	5	2	+0.060 0	0.5 0.7 0.9 1.15	2					
	4	-0.004 -0.012				4	M4	6	8	6	3	+0.075 0							
	5					5	M5	7	9	7	4								
	6					6	M6	8	10	8	5								
		8				-0.005 -0.014	7~60	5~100	5~10	8	M8	10			12	10	7	+0.090 0 -0.090	3
		10				-0.006 -0.017				10	M10	13			15	13	9.6	0 -0.110	
12		10~100	5~15	12	M12					15	17	14	11.5	4					
15										18	20	17	14.3						