




型号(①代码·②D) — ③L
EAGB3 — 12

■请按步骤①~③选择型号和参数后进行订购。



型号区分: ④
交货期: 7天发货


■通用销 直杆型(g6)



代码		材质		硬度	
EAGB		SUJ2		58HRC~	
EAMGS		SUS440C		58HRC~	
EAGS		SUS304		-	

l ₁	D _{g6}	型号		③L							
		① 代码	② D								
1.0	-0.002 -0.008	EAGB EAMGS EAGS	2	6	8	10	12	15			
			3	6	8	10	12	15	20		
4	8		10	12	15	20					
			5	8	10	12	15	20			
2.0	-0.005 -0.014		6	10	12	15	20				
			8	15	20						


■定位销 一端螺纹型(h7)



代码		材质		硬度	
EAHT		SUS440C		40~50HRC	

l ₁	l ₂	M×P	l	D _{h7}	型号		③L									
					① 代码	② D										
1.5	0.3	3×0.5	6	-0.012	EAHT	5	10	15	20	25	30					
						6	10	15	20	25	30	35	40	45	50	
2.0	0.5	4×0.7	*8	-0.015		8	15	20	25	30	35	40	45	50		
						10	15	20	25	30	35	40	45	50		
2.5	1.0	6×1.0	10	-0.018		12	30	35	40	45	50					

■通用销 一端螺纹型(g6)

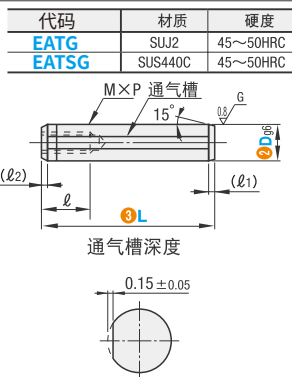

l ₁	l ₂	M×P	l	D _{g6}	型号		③L						
					① 代码	② D							
1.5	0.3	3×0.5	6	-0.004 -0.012	EATG	5	10	15	20				
						6	10	15	20	25	30		
2.0	0.5	5×0.8	8	-0.005 -0.014		8	15	20	25	30	35	40	
						10	20	25	30	35	40		
2.5	1.0	6×1.0	10	-0.006 -0.017		12	30	35	40	45			

l ₁	l ₂	M×P	l	D _{g6}	型号		③L						
					① 代码	② D							
1.5	0.3	3×0.5	6	-0.004 -0.012	EATSG	5	10	15	20				
						6	10	15	20	25	30		
2.0	0.5	5×0.8	8	-0.005 -0.014		8	15	20	25	30	40		
						10	20	25	30	40			
2.5	1.0	6×1.0	10	-0.005 -0.014		10	20	25	30	40			